


## RS 7.0 DESCRIPTION

Spray or roller applied epoxy vinyl ester, flake filled basecoat with 1.5-oz. chopped strand mat embed and single resin rich veil embed.

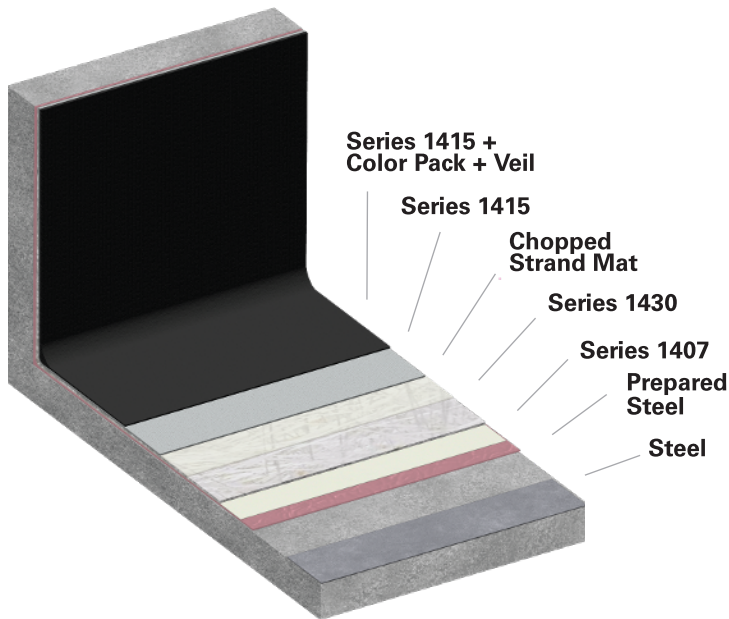

## COMMON AREAS OF USE

- Enhanced temperature service
- Industrial chimney flues
- Concrete or steel tanks subject to heavy chemical cleaning and thermal shock
- Fats, oil and grease services at elevated temperatures and with high solids

## RS 7.0 DETAILS

|                            |   |                |                 |
|----------------------------|---|----------------|-----------------|
| <b>Surface Preparation</b> | SSPC-SP10 / NACE 2 / 3.0-mil minimum anchor profile               | --             | --              |
| <b>Prime Coat (Stripe)</b> | Series <a href="#">1407</a> Vinester*                             | 4-6 mils DFT   | 275 sq ft / gal |
| <b>Mortar Coat</b>         | Series <a href="#">1430</a> ProPolymer                            | 20-25 mils DFT | 65 sq ft / gal  |
| <b>Mat</b>                 | Series <a href="#">211-227</a> 1.5-oz Chopped Strand Mat          | --             | --              |
| <b>Saturant Coat</b>       | Series <a href="#">1415-900</a> Vinester                          | 20 mils DFT    | 60 sq ft / gal  |
| <b>Saturant Coat</b>       | Series <a href="#">1415-900</a> Vinester + Series 1400 Color Pack | 25 mils DFT    | 60 sq ft / gal  |
| <b>Veil**</b>              | 451-A0010 or M524-ECR30S  |                | --              |

**70 mils DFT**

\*Do not use Series 1407 in wet or dry services of >180°F (82°C) or 200°F (93°C) spikes. Preference is direct-to-metal.

\*\*Contact your local Tnemec representative for specified veil.

**Note:** Coverage rates are theoretical (no loss). Reference Tnemec data sheets, application guides and construction details for more information.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at [tnemec.com](http://tnemec.com) or contact your Tnemec technical representative. © Tnemec Company, Inc. RS70S