

# Strata-Flake PA

## SYSTEM DETAILS

### Series 256 or 257 ExcellaThane

An extremely fast-curing, multi-purpose and finish coat resin with low temperature cure capability. Used as a decorative flake filled floor topping systems. Series 256 or 257 will provide protection against impact, abrasion and mild chemicals, has excellent gloss and color retention, and resistance to yellowing. These low VOC, 100% solids urethanes exhibit low odor characteristics allowing for use near occupied spaces. Note: Series 257 ExcellaThane SS offers a longer working time and lower viscosity.

### Decorative Flake

#### Series N224 Deco-Fleck (Part C)

Decorative aggregate featuring multicolored vinyl flakes locked into a clear epoxy for unmatched endurance and visual appeal.




## FEATURES AND BENEFITS

- Aesthetically pleasing, multicolored flake floor
- Seamless, durable, and easy to clean
- Low odor for use near occupied spaces
- Resistant to ambering and color change
- Customizable texture/slip resistance

## COMMON AREAS OF USE

- Laboratories
- Health Care Facilities
- Educational Facilities
- Veterinary Facilities
- Locker Rooms
- Pharmaceutical Facilities
- Transportation Hubs
- Stadiums
- Correctional Facilities

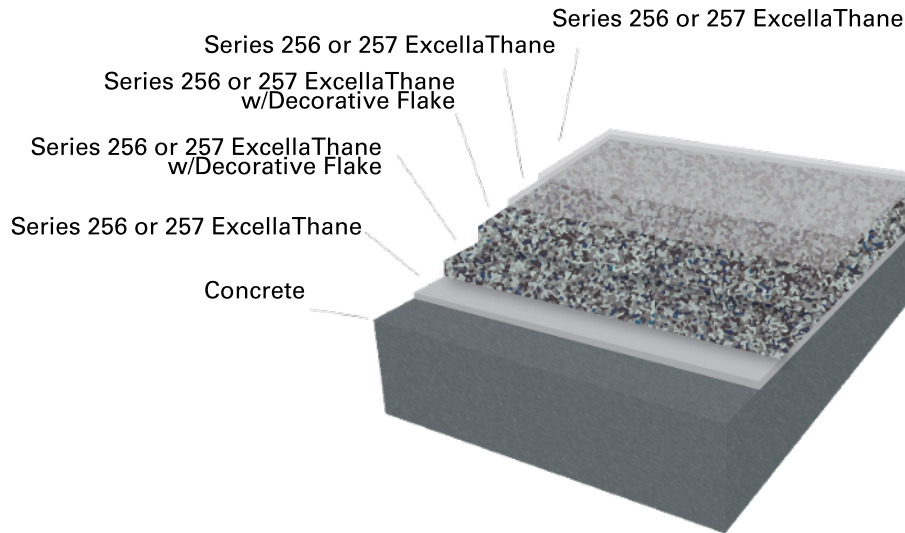

## SYSTEM SPECIFICATIONS

Coating	Tnemec Product	Typical Thickness	Additional Information
Primer <sup>1</sup>	Series 256 ExcellaThane Series 257 ExcellaThane SS	250 sq ft/gal	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a>
Base Coat <sup>1</sup>	Series 256 or 257 ExcellaThane (pigmented) <u>broadcast to refusal</u> with N224-Part C Decorative Flake	160 sq ft/gal	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a> <a href="#">Decorative Flake CC</a>
Base Coat (Optional) <sup>1</sup>	Series 256 or 257 ExcellaThane (clear) <u>broadcast to refusal</u> with N224-Part C Decorative Flake	160 sq ft/gal	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a> <a href="#">Decorative Flake CC</a>
Grout Coat <sup>1</sup>	Series 256 ExcellaThane (Clear) Series 257 ExcellaThane SS (Clear)	100 - 200 sq ft/gal	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a>
Finish Coat <sup>1</sup>	Series 256 ExcellaThane Series 257 ExcellaThane SS	100 - 200 sq ft/gal	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a>
Optional Cove Base	Series 256 or 257 ExcellaThane mixed with aggregate to form cove mortar	4" rolled radius or 1" cant cove	<a href="#">Product Data Sheet</a> <a href="#">Product Data Sheet</a>

<sup>1</sup> Select Primer, Base Coat(s), Grout Coat, and Finish Coat based on the desired attributes.

## THE RIGHT SYSTEM FOR YOUR PROJECT

For help determining the best coating system for your needs, contact your local Tnemec representative. Our representatives are among the most tenured and knowledgeable experts in the industry and can help you understand the benefits of specifying and applying the ideal coating system on your structures.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at [tnemec.com](http://tnemec.com) or contact your Tnemec technical representative. © Tnemec Company, Inc. FSEP06