

Strata-Crete HS-HT

Series N242 Ultra-Tread S

A low odor, slurry applied, flowable mortar floor topping designed for monolithic applications in abusive service areas. Provides superior performance to other flooring systems such as acid brick, quarry tile and most polymer flooring systems. Designed for use in food and beverage facilities, pharmaceutical and processing areas, commercial and restaurant kitchens or anywhere a durable floor topping is required.

Series N222 Deco-Tread

A low ambering, multi-purpose epoxy coating with enhanced UV stability and resistance to yellowing. Series N222 can be used as a primer, broadcast, slurry/broadcast, mortar, grout coat, metallic color coat, and topcoat. It provides excellent application properties with good flow and self-leveling characteristics. It protects concrete surfaces from impact and abrasion and has excellent chemical resistance with an aesthetically pleasing appearance.

Series 247 and 248 EverThane

Extremely hard, chemical-resistant urethane floor coating with superb flow characteristics. Excellent resistance to abrasion, wet conditions, corrosive fumes and chemical contact. Excellent gloss and color retention. Low odor characteristic allows for use near occupied space. *Note:* For horizontal surfaces only.




FEATURES AND BENEFITS

- Aesthetically pleasing, pigmented floor
- Seamless, durable, and easy to clean
- Low odor for use near occupied spaces
- Resistant to ambering and color change
- Chemical resistant
- Tolerates high moisture vapor transmission (MVT)
- Resistant to thermal shock
- Suitable for USDA & FDA regulated facilities

COMMON AREAS OF USE

- Laboratories
- Health Care Facilities
- Educational Facilities
- Veterinary Facilities
- Locker Rooms
- Pharmaceutical Facilities
- Transportation Hubs
- Stadiums
- Correctional Facilities

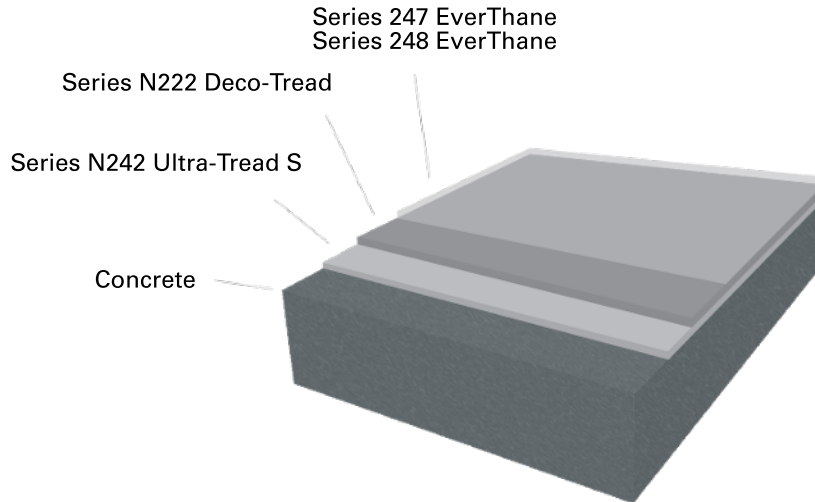

SYSTEM SPECIFICATIONS

Coating	Tnemec Product	Typical Thickness	Additional Information
Base Coat	Series N242 Ultra-Tread S <u>broadcast to refusal</u> with silica sand	36 sq ft/gal	Product Data Sheet
Grout Coat	Series N222 Deco-Tread (pigmented)	250 sq ft/gal	Product Data Sheet
Finish Coat ¹	Series 247 EverThane (pigmented) Series 248 EverThane (pigmented)	480 - 730 sq ft/gal	Product Data Sheet Product Data Sheet
Optional Cove Base	Series N222 Deco-Tread mixed with aggregate to form cove mortar	4" rolled radius or 1" cant cove	Product Data Sheet

¹ Select Finish Coat based on the desired attributes and sheen.

THE RIGHT SYSTEM FOR YOUR PROJECT

For help determining the best coating system for your needs, contact your local Tnemec representative. Our representatives are among the most tenured and knowledgeable experts in the industry and can help you understand the benefits of specifying and applying the ideal coating system on your structures.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. FSEP07